



ICONIC FASCIA WALL COLLECTION

DESCRIPTION: Fascia Panel & Corner **TEXTURE:** Klean-Bloc Natural Stone

PALLET OVERVIEW - PANELS



PALLET OVERVIEW - CORNERS





COMPATIBLE CAPS

See page 140 for product compatibility.



Klean-Bloc technology
See page 24.

NOTES

See page 135 to 156 for more technical information.

Fascia Panels require single-sided structural blocks (retaining wall application) or double-sided structural blocks (freestanding walls). Sold Separately.


Spe	cifications per pallet	Imperial	Metric
CIA	Cubing	45 units	45 units
FASCIA		47.95 ft ²	4.46 m ²
		97.44 lin. ft	29.70 lin. m
	Approx. Weight	1 390 lbs	630 kg
	Number of rows	3	
	Coverage per row	15.98 ft ²	1.49 m ²
	Linear coverage per row	32.48 lin. ft	9.90 lin. m



Specifications per pallet			Imperial		М	Metric		
VER.	Cubing		24 units		24	24 units		
CORNER	Approx. Weight			700 lbs		3.	318 kg	
0	Number of rows		1					
	Pillar height			35 ½ in		90	900 mm	
	L2		Unit dimensio	ns	in	mm	Units/pallet	
	D H	A	Heig	ht	5 %	150	12 units	
		LEFT UNIT	Dep	th	2 3/4	70		
			Leng	th,	23 1/4	590		
_	L2		Unit dimensio	ns	in	mm	Units/pallet	
	J H	В	Heig	ht	5 %	150	12 units	
		RIGHT UNIT	Dep	th	2 3/4	70		
		TH	Leng	th,	23 1/4	590		




FREESTANDING WALL

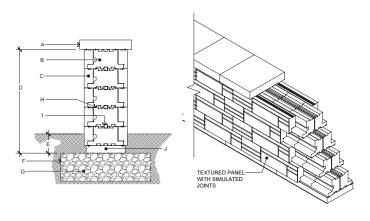


- A. TECHO-BLOC CAP UNIT SECURED TO CORE AND PANEL BELOW WITH FLEXLOCK ADHESIVE
- B. STRUCTURAL BLOCK DOUBLE-SIDED UNIT
- C. PANEL UNIT
- **D.** 29 1/2" (750 mm) MAX.
- E. EMBEDMENT DEPTH 6" (150 mm) MIN.
- F. GEOTEXTILE
- COMPACTED GRANULAR BASE 6" (150 mm) MIN. THICKNESS ACCORDING TO PROJECT SPECIFICATIONS
- H. FLEXLOCK ADHESIVE
- I. HDPE HORIZONTAL KEY
- J. BASE UNIT

FREESTANDING WALL - 90° CORNER

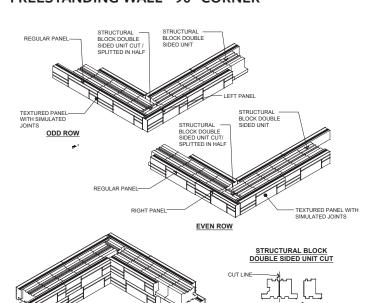


- 1. ALTERNATE ODD AND EVEN ROWS.
- STAGGER STRUCTURAL BLOCKS JOINTS FROM ONE ROW TO THE NEXT.
- GLUE ALL STRUCTURAL BLOCKS AT EACH ROW WITH FLEXLOCK ADHESIVE.
- **4.** APPLY FLEXLOCK ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.
- STRUCTURAL BLOCK DOUBLE SIDED UNIT CUT / SPLITTED IN HALF MUST ALWAYS BE PRESENT AT THE CORNER OF THE WALL.


GRAVITY RETAINING WALL

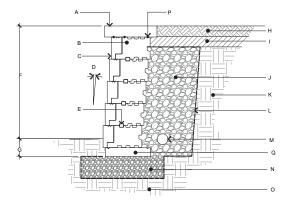

- **A.** TECHO-BLOC CAP UNIT SECURED TO UNIT BELOW WITH FLEXLOCK ADHESIVE
- B. STRUCTURAL BLOCK SINGLE SIDED UNIT
- C. PANEL UNIT
- **D.** WALL INCLINATION (5.3°)
- E. HDPE HORIZONTAL KEY
- F. EXPOSED HEIGHT
- G. EMBEDMENT DEPTH
- H. TOP SOIL
- I. LOW PERMEABILITY SOIL
- **J.** 3/4" (20 mm) CLEAN STONE 14" (350mm) THICK MIN.
- K. RETAINED SOIL
- L. GEOTEXTILE
- M. PERFORATED DRAIN
- N. LEVELING PAD
- **O.** FOUNDATION SOIL **P.** FLEXLOCK ADHESIVE
- Q. BASE UNIT


FREESTANDING END OF A STRAIGHT WALL (OPTION 1)



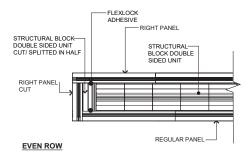


NOTES:

- ALTERNATE ODD AND EVEN ROWS.
 STAGGER STRUCTURAL BLOCKS JOINTS FROM ONE ROW TO THE NEXT.
- GLUE ALL STRUCTURAL BLOCKS AT EACH
- ROW WITH FLEXLOCK ADHESIVE.
 APPLY FLEXLOCK ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.




FREESTANDING END OF A STRAIGHT WALL (OPTION 2)

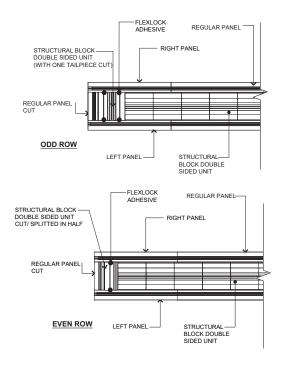


NOTES:

- ALTERNATE ODD AND EVEN ROWS.
 STAGGER STRUCTURAL BLOCKS JOINTS
 FROM ONE ROW TO THE NEXT.
- GLUE ALL STRUCTURAL BLOCKS AT EACH ROW WITH FLEXLOCK ADHESIVE
- APPLY FLEXLOCK ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.





177

PILLARS - FASCIA WALL COLLECTION

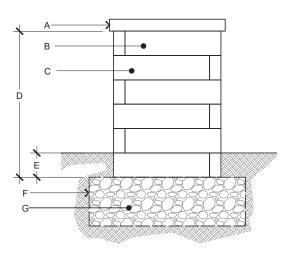


STRUCTURAL BLOCK SINGLE SIDED UNIT CUT / SPLITTED IN HALF






- PILLAR CAP UNIT SECURED TO CORE AND PANEL BELOW WITH FLEXLOCK ADHESIVE
- B. RIGHT PANEL
- C. LEFT PANEL
- **D.** 35 7/16" (900 mm) MAX HEIGHT
- E. EMBEDMENT DEPTH 6" (150 mm) MIN.
- F. GEOTEXTILE
- G. COMPACTED GRANULAR BASE 6" (150 mm) MIN. THICKNESS ACCORDING TO PROJECT SPECIFICATIONS.

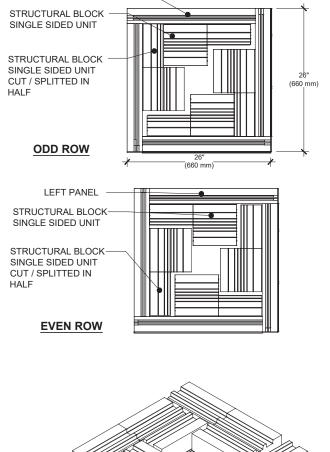

RIGHT PANEL

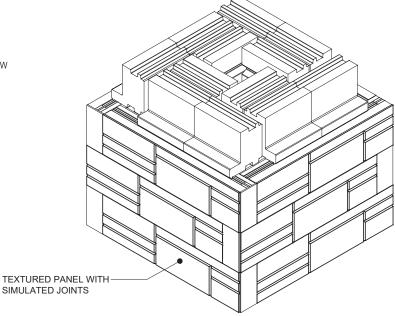

For all possible combinations of pillars and caps, please refer to the correspondence table on page 140

STEPS - FASCIA WALL COLLECTION

