# **MOEN**®

#### **DESCRIPTION**

- Various finishes identified by suffix
- Magnetix™ technology features an innovative magnetic docking system
- Includes rainshower, handshower, hose and magnetic docking system
- 60" double interlock spiral hose (metal), for Chrome and Spot Resist Brushed Nickel finishes
- 1/2" IPS connection

#### **OPERATION**

- Rainshower is single function, Handshower is six functions
- Rotate outer ring to select function
- 3-way diverter provides ability to flow each shower head separately or combined for more coverage
- Pause/trickle button allows to momentarily pause the handshower flow at a push of a button

#### **FLOW**

- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi (for models manufactured after 3/1/2018)
- Designed to deliver 2.0 gpm (7.6 L/min) MAX at 80 psi (for models manufactured before 3/1/2018)

## **STANDARDS**

- Designed and manufactured to comply with the applicable requirements of ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations
- ADA (E) compliant

### WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations


# Specifications



Attract™ 6-Function Rainshower/ **Handshower Combo with** Magnetix™ Docking Hose

Model: 26008 series



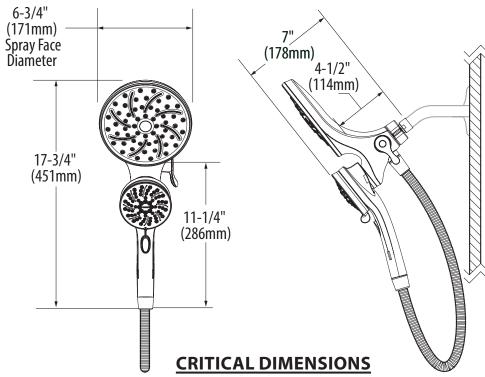

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN