

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Duralock™ quick connect installation
- Pullout spray with 68" braided hose
- Flexible supplies with 3/8" compression fittings

## OPERATION

- Lever style handle
- Temperature controlled by 120° arc of handle travel
- Spout rotation is 120°
- Operates with less than 5lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

## FLOW

- Aerator is limited to 1.5 gpm (5.7 L/min) max.
- Operates in eco-performance mode by default in aerated and spray stream

## CARTRIDGE


- 1255™ Duralast™ cartridge for single-handle faucets
- Engineered polymers, nonferrous and stainless steel materials

## STANDARDS

- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- **ADA** ♿ for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

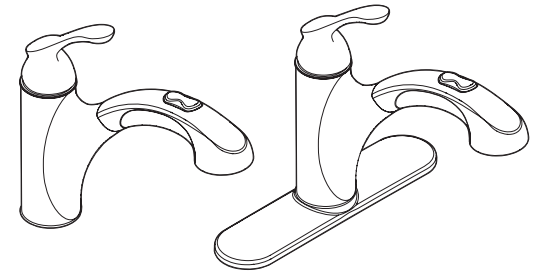

## Banbury® Single-Handle Kitchen Pullout Faucet

Models: 87017 series

**NOTE:** DESIGNED TO INSTALL THROUGH  
1 OR 3 HOLES 1-1/2" (38mm) DIA.

