


YORK 60"

DESCRIPTION: Step TEXTURE: Limestone surface with chiseled edges

PALLET OVERVIEW



Specifications per pal	let Imperial	Imperial			
Cubing	2 units		2 units		
Linear coverage per pallet	10 lin. ft/pa	10 lin. ft/pal		3.05 lin. m/pal	
Approx. Weight	1 029 lbs	1 029 lbs		467 kg	
Number of rows	1				
	Unit dimensions	in	mm	Units/pallet	
L H A	Height	6	152	2 units	
	Depth	15	381		




NOTES

York is a single sided step chiseled on 3 sides.

*For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.

To achieve a natural appearance, product dimensions can vary $\pm \frac{3}{16}$ " (5 mm) for height

and $\pm \frac{1}{2}$ " (13 mm) for length and width.

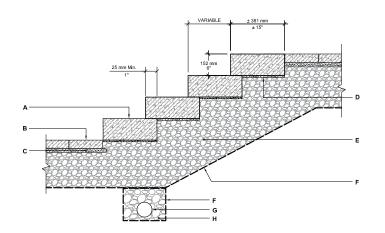

A. YORK STEP UNIT

- **B.** TECHO-BLOC CONCRETE PAVER
- C. SETTING BED 1" (25 mm) THICK
- D. SETTING BED ½" (12 mm) MAX. TO COMPACT (AS REQUIRED FOR ALIGNMENT)
- E. COMPACTED GRANULAR BASE 0-3/" (0-20 mm) THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS
- F. GEOTEXTILE
- **G.** PERFORATED DRAIN 4" (100 mm) DIA. CONNECTED TO SERVICES
- H. CLEAN STONE 3/4" (20 mm)

